





**100% MADE
IN THE
U.S.A**

Certified Polyolefin Coated Expansion Fitting

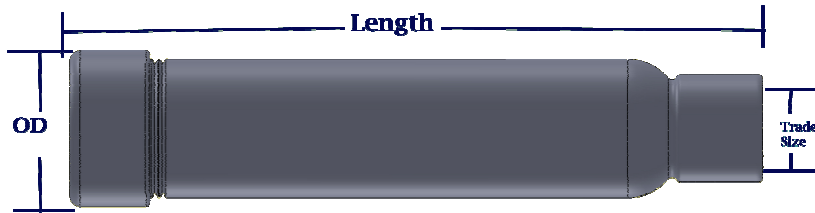

Set 2" for 4" Movement and 4" for 8" Movement

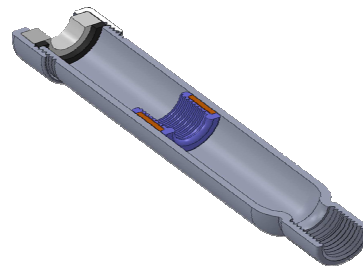

Application

- "XFGC" Expansion Couplings allow Movement on Conduit Runs Where Longitudinal Movement Can Occur
- Used in Both Indoor (Large Buildings, Waste Water Treatment Facilities) And Outdoor (Bridges, Highways, Tunnels) & Runs That Cross Structural Joints
- Prevention of Conduit Buckling & Resulting in Damage

Design Features:

- 40 mil Polyolefin Coated GRC
 - Certified seal to guarantee proper assembly
 - No Vocs
 - No Halogens
 - Environmentally Friendly
 - UV Resistant
 - Fire-Resistant
 - Polyolefin coating UL224 File 331952
 - Operating Temp -55° to + 135° C (-67° to 275°) F
 - Voltage 600V
- Hot Dipped Galvanized
- Patent Pending Internal Ground
 - Eliminates Need for Ext. Bonding Jumper
 - Designed For Quick & Efficient Install
- Available in 4" or 8" Maximum Conduit Movement
- Available in 1/2" Thru 6" Conduit Sizes
- Customizable Body Lengths Available
- Significantly Reduced Lead Times and installation times as well.

Certifications & Compliances

- 2018 UL Listed (File # E494695) OD sizes 1/2" - 3"
- UL Standard 514B OD sizes 1/2" - 6"
- CSA 22.2 NO 18 3-12
- NEMA FB1
- Wet Locations
- SAE-AMS-dTL-23053/5 Class 1 and 3

Cross Reference Part No.

TRADE SIZE	Our Part No.	O.D.	LENGTH	WEIGHT	CROUSE HINDS	OZ GEDNEY	THOMAS AND BETTS
4" Movement							
1/2"	XFGCC4-50	1.315	6.00	11.8 oz	XJG14	AXB50	N/A
3/4"	XFGCC4-75	1.66	6.00	1 lbs 1.2oz	XJG24	AXB75	XJG24-TB
1"	XFGCC4-100	1.9	7.25	1 lbs 6.4oz	XJG34	AXB100	XJG34-TB
1-1/4"	XFGCC4-125	2.375	8.00	2 lbs 7.2oz	XJG44	AXB125	XJG44-TB
1-1/2"	XFGCC4-150	2.625	8.00	2 lbs 10.7oz	XJG54	AXB150	XJG54-TB
2"	XFGCC4-200	3	8.00	2 lbs 12.7oz	XJG64	AXB200	XJG64-TB
2-1/2"	XFGCC4-250	3.75	8.50	4 lbs 10.1oz	XJG74		XJG74-TB
3"	XFGCC4-300	4	8.50	4 lbs 11.3oz	XJG84		XJG84-TB
4"	XFGCC4-400	5.563	8.50	14 lbs 6.1oz	XJG104		XJG104-TB
5"	XFGCC4-500	6.8125	8.50	17 lbs 7 oz	XJG114		NA
6"	XFGCC4-600	8	8.50	21 lbs	XJG124		NA
8" Movement							
1/2"	XFGCC8-50	1.315	10.00	12.3oz	XJG18	AXB850	N/A
3/4"	XFGCC8-75	1.66	10.00	1lbs 6oz	XJG28	AXB875	XJG28-TB
1"	XFGCC8-100	1.9	11.25	1lbs 10oz	XJG38	AXB8100	XJG38-TB
1-1/4"	XFGCC8-125	2.375	12.00	2lbs 11oz	XJG48	AXB8125	XJG48-TB
1-1/2"	XFGCC8-150	2.625	12.00	2lbs 14oz	XJG58	AXB8150	XJG58-TB
2"	XFGCC8-200	3	12.00	3 lbs 2oz	XJG68	AXB8200	XJG68-TB
2-1/2"	XFGCC8-250	3.75	12.00	5 lbs 2oz	XJG78		XJG78-TB
3"	XFGCC8-300	4	12.50	5 lbs 8oz	XJG88		XJG88-TB
4"	XFGCC8-400	5.563	12.50	15 lbs	XJG108		XJG108-TB
5"	XFGCC8-500	6.8125	12.50	18 lbs 10 oz	XJG118		XJG108-TB
6"	XFGCC8-600	8	12.50	22 lbs 4 oz	XJG128		XJG108-TB